

# SMM 535

## Serial Master Module

As of production version 190615

- Firmware versions:
- ASD 531 / 532 from 01.01.00
  - ASD 535 from 01.04.00
  - ADW 535 from 01.01.11

The SMM 535 is an additional module for networking special fire detectors ASD or ADW.



Fig. 1 SMM 535

### Description

The SMM 535 is the master module for networking multiple ASD / ADW special fire detectors via RS485 bus. The SMM 535 is connected to a PC by means of a USB cable and constitutes the access point to the ASD network. The "ASD /ADW Config" configuration software serves as the user interface on the PC. The SMM 535 provides galvanic separation between the RS485 and USB interface.

### Mounting / Installation

The SMM 535 is mounted at a central location where the operator of the system also has access. There are four holes in the map case of the SMM 535 for fastening.

On the exterior of the map case, the SMM 535 serial master module has a 3-pin plug-in terminal for connecting the network and a USB connector for connecting the PC. The SMM 535 is supplied with power via the USB interface from the PC. Three LEDs on the exterior of the map case indicate the state of the SMM 535.

### Design of the network

An network can have up to 250 participants. The SIM 35 serial interface module is built into each ASD 535 as an interface module.



The normative alarm transmission of the special fire detectors to the higher level point does not use the network. The "Alarm" / "Fault" relays in the special fire detectors or SecuriLine (SLM 35) are used for that.

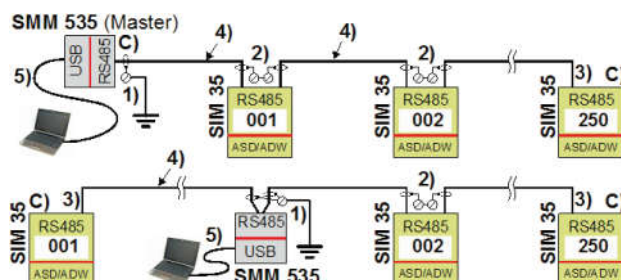


Fig. 2 Design of the network

- 1) Screen with equipotential bonding connected, always only on the SMM 535, do not connect on the last SIM 35; **3)**
- 2) Screen connected by means of a lustre terminal.
- 3) If SMM 535 is within the network, do not connect the screen on the first and last SIM 35 (beginning and end).
- 4) Network cable: 4-core, twisted / screened (only 3 wires are used, total length max. 1.000 m).
- 5) USB cable; max. 3 m in length.
- C) There must be **bus termination** on both sides of the network (beginning and end); jumper "**TERM**", position "**C**".

### Programming

Jumper TERM	Bus termination (position "C" = active)
Position O	SMM 535 is <u>not</u> first or last module
Position C	SMM 535 is <u>first</u> or <u>last</u> module

No network address has to be assigned to the SMM 535.

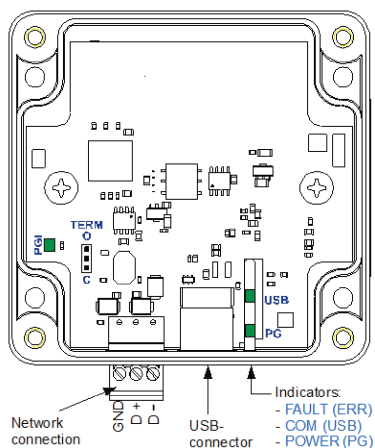


Fig. 3 View of SMM 535

## Indicators

Three LEDs on the SMM 535 indicate the operating state. Two of these are supplied by fibre optic cable on the exterior of the map case (FAULT LED not present, optional).

LED outside	State / meaning
<b>POWER (PG)</b> (green)	<b>continuously lit</b> , power supply from PC (USB) OK
<b>COM (USB)</b> (green)	<b>flashes</b> , communication running, "ASD / ADW Config" is active
LED inside	State / meaning
<b>PGI (green)</b>	<b>continuously lit</b> , supply voltage OK (after galvanic separation)

## Dimensioned drawing

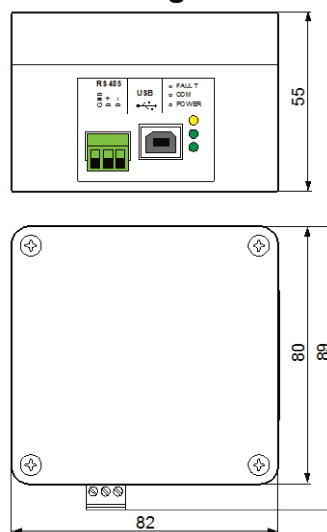


Fig. 4 SMM 535 dimensioned drawing

## Terminal assignment

Terminal / signal	Installation
GND	1 <sup>st</sup> conductor from wire pair 2
D +	1 <sup>st</sup> conductor from wire pair 1
D -	2 <sup>nd</sup> conductor from wire pair 1

twisted

Termination of screening, see Fig. 2.

## Article numbers / Spare parts

Brief description	Article number
SMM 535	11-2200001-01-XX
Technical Description ASD 532	T 140 421
Data sheet ASD 532	T 140 422
Technical Description ASD 535	T 131 192
Data sheet ASD 535	T 131 193
Technical Description ADW 535	T 140 358
Data sheet ADW 535	T 140 359
Data sheet ASD 535	T 140 011

## Technical data

Type	SMM 535	
Operating voltage from PC via USB connection	5	VDC
Power consumption from PC via USB connection	max. 100	mA
Ambient conditions acc. to IEC 721-3-3 / EN 60721-3-3 (1995)	3K5 / 3Z1	Class
Extended ambient conditions:		
• SMM 535 temperature range	-30 – +60	°C
• Max. permitted storage temperature (without condensation)	-30 – +70	°C
• Humidity ambient condition (transient without condensation)	95	% rel. hum.
• Humidity ambient temperature (continuous)	70	% rel. hum.
Plug-in terminals	1.5	mm <sup>2</sup>
Cable type: 4-core, twisted in pairs, screened, impedance 120R	at least 0.2	mm <sup>2</sup>
maximum line length of the entire network	1,000	m
Dimensions (W x H x D)	82 x 89 x 55	mm
Weight	165	g

Changes to Index c on pages: 1, 1, 2, 2