



CHARACTERISTIC / CARATTERISTICHE	
Volt	12V
Capacity / Capacità	20h 160Ah
	5h 136Ah
Internal Resistance	Full Charged Battery 25°C ≤4.5mΩ
Capacity affected by Temperature / Effetti delle temperature sulla capacità	40°C 102%
	25°C 100%
	0°C 85%
	-15° 65%
Self-Discharge 25°C Capacity / Autoscarica a 25°C	after 3 month storage 90%
	after 6 month storage 80%
	after 12 month storage 62%
Charge (Costant Voltage 25°C)	Float Volt 13.6 - 13.8V
	Charge Max.5.4Amp. 14.4 - 14.9 Volt



CHARACTERISTIC / CARATTERISTICHE			
Battery dimensions / Dimensioni batteria			
L/L	W/P	H/A	Tot - H/A
483	170	240	240
Box Dimensions / Dimensioni scatola			
L/L	W/P	H/A	
-	-	-	
Weight / Peso		46Kg	
Terminal / Terminali		M8	
Case / Contenitore		ABS	

Amp. (25°C)


F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V												
1.65V												
1.70V												
1.75V												
1.80V												

Watts (25°C)


F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V												
1.65V												
1.70V												
1.75V												
1.80V												

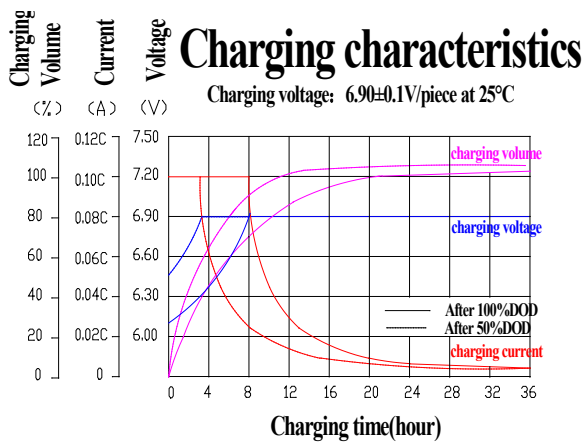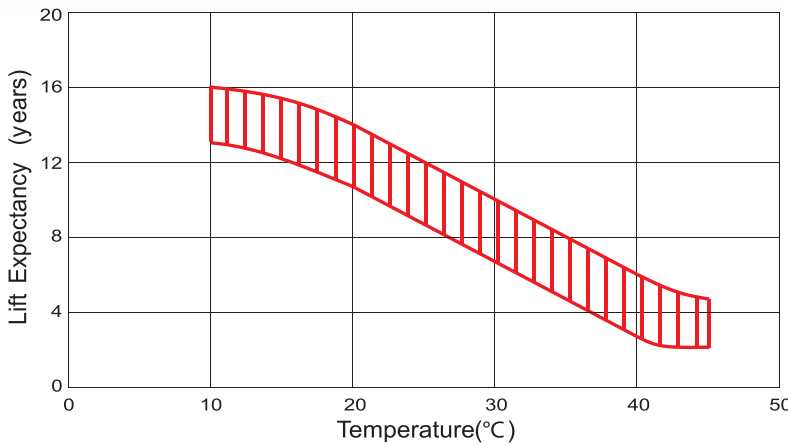

Temperature effect on battery self-discharge

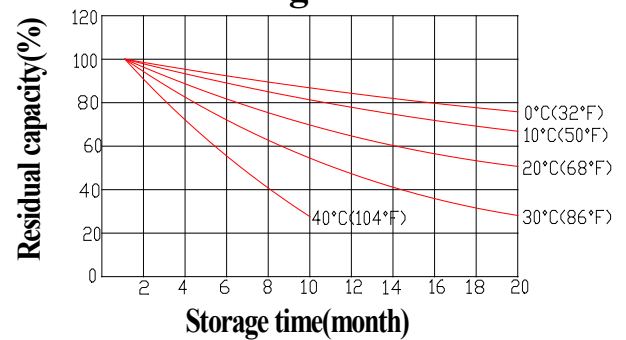

Discharge characteristics (25°C)

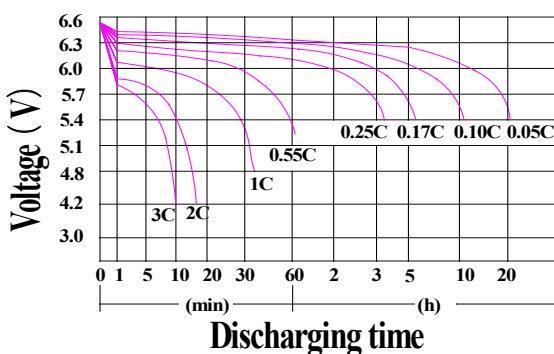

Temperature effect on capacity

